



### Onyxx<sup>®</sup> XM 34IO Features

- ✓ Can be used with a JENESys<sup>®</sup> Edge<sup>™</sup> 534 and Onyxx XM 34IO-B
- ✓ Extremely compact, modular design allows flexibility/versatility in various combinations of IO
- ✓ Extends 34 points to an Onyxx-capable device
- ✓ 34 Points of Inputs/Outputs
- ✓ Add to an Onyxx XM 34IO-B, up to 8 additional extender modules (at 34 points of IO each) for a maximum of 306 points
- ✓ Small unit footprint (4.5" x 4.25" x 2.25")
- ✓ Low power

### Specifications

- ✓ 10 Digital Outputs
- ✓ 8 Analog Outputs
- ✓ 16 Universal Inputs
- ✓ Input mode setting per Universal Input (resistance, voltage, current, pulse, etc.)
- ✓ Micro USB (1), Onyxx Network
- ✓ Wired 24 Vac/dc
- ✓ 35 mm DIN rail or flat panel mounting

### Lynxpring's Onyxx XM 34IO and Onyxx XM 34IO-B (BACnet)

The Onyxx XM 34IO and Onyxx XM 34IO-B (BACnet) are part of Lynxpring's Edge-to-Enterprise portfolio of hardware, software and tools designed for today's buildings, IoT environments, device-to-enterprise integrations and machine-to-machine applications.


Designed to provide maximum performance at minimum cost, the units are completely extendable and can be configured to add additional IOs to any JENESys Edge 534 IoT Controller with up to 306 IOs or any JENESys Edge 100 Controller.

The Onyxx XM 34IO has 34 points and native Onyxx and extends the IO for any device that has an Onyxx network. The Onyxx XM 34IO-B has 34 points and enables an Onyxx Network and is a slave BACnet MS/TP device that can be integrated by a BACnet client controller.


Various combinations of the Onyxx XM 34IO and Onyxx XM 34IO-B can further extend the JENESys Edge 100 to 272 IO and the JENESys Edge 534 to 306 IO.

### Use Cases

- ✓ Additional IO for a JENESys Edge 534
- ✓ The Onyxx Network supports Onyxx XM 34IO Modules


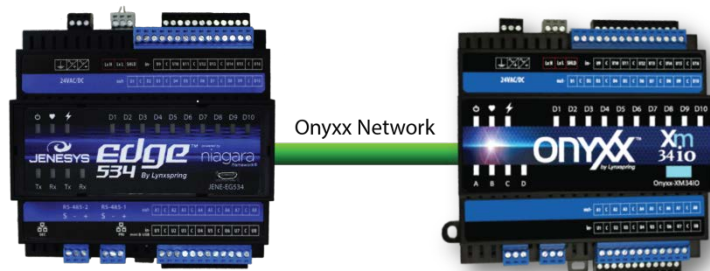


**Note:** Add to a JENE-EG534, up to 8 additional Onyxx-XM34IO extender modules (at 34 points of IO each) for a maximum of 306 points.

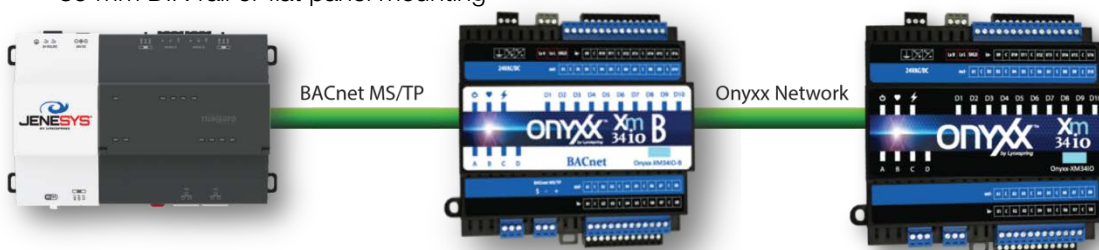

**Note:** Connect up to 8 additional Onyxx-XM34IO extender modules (at 34 points of IO each) to an Onyxx-XM34IO-B for a maximum of 306 points.

### Dimensions

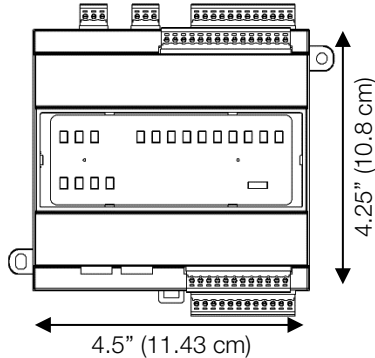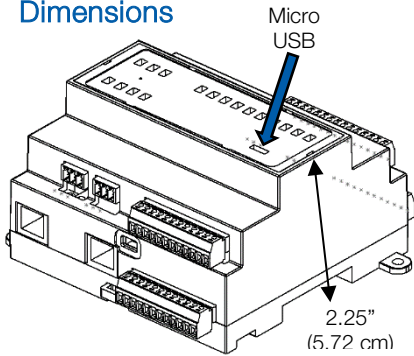

### Specifications

#### PLATFORM

Operating System Helixx<sup>®</sup> Framework by Lynxspring<sup>®</sup>

#### COMMUNICATION PORTS

Micro USB Serial shell access  
 Onyx Network 3-wire (LxH LxL SHLD) high-speed differential serial signal

#### INPUTS AND OUTPUTS

16 Universal Inputs Type-3 10K ohm thermistors; resistance 0-100K ohms; 0-10 Vdc; 0-20 mA using a 499 ohm resistor; pulse input: up to 500Hz  
 10 Digital Outputs Form A contacts, 24V at 0.5 Amp  
 8 Analog Outputs 0-10 Vdc  
 Connector Screw Size 3/32" slotted  
 Supported Wire Size 16-28 AWG  
 Housing UL94V-0

#### POWER

Power Input External 24Vac/dc power supply, minimum 10VA/module

#### CHASSIS

Construction Base: Plastic, DIN rail or screw mount Cover: Plastic  
 Cooling Internal air convection  
 Dimensions 4.5" (11.43 cm) width x 4.25" (10.8 cm) length X 2.25" (5.72 cm) depth  
 Mounting Flat panel and 35mm DIN rail mounting options standard  
 Recommended maximum cable length: 30 feet

#### ENVIRONMENT

Operating Temperature Range 0 – 60 °C (32 –140 °F)  
 Storage Temperature Range 0 – 70 °C (32 –158 °F)  
 Relative Humidity Range 5 – 95% RH, non-condensing

#### CERTIFICATIONS

Compliance Approved: FCC 47CFR Parts 15B and 18, EN 55022, EN 55011, ICES-003, RoHS  
 In Process: UL 916, CSA C22.2 No. 205-12, EN 61010-1: 2010, IEC 61010-1, 3rd edition

#### WEIGHT

Onyx-XM34IO with cables 0.9 pounds  
 Product and Packaging 1.6 pounds

### Ordering Information

#### PART NUMBER(S)

Onyx-XM34IO

#### DESCRIPTION

Packaging will include one (1) Onyx XM 34IO Extender Module

©2017 by Lynxspring, Inc. All rights reserved. The information and/or specifications published here are current as of the date of publication of this document. Lynxspring, Inc. reserves the right to change or modify specifications without prior notice. The latest product specifications can be found by contacting our corporate headquarters in Lee's Summit, Missouri. Products or features contained herein are covered by one or more United States or foreign patents. Other brand and product names are trademarks or registered trademarks of their respective holders. This document may be copied by parties who are authorized to distribute Lynxspring products in connection with distribution of those products, subject to the contracts that authorize such distribution. It may not otherwise, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form without prior written consent from Lynxspring, Inc. Complete Confidentiality, Trademark, Copyright and Patent notifications can be found at: [lynxspring.com/company/legal](http://lynxspring.com/company/legal).

Lynxspring<sup>®</sup>, JENEsys<sup>®</sup>, Onyx<sup>®</sup> and Helixx<sup>®</sup> are registered trademarks of Lynxspring, Inc. JENEsys Edge<sup>™</sup> is a trademark of Lynxspring, Inc.

Niagara Framework<sup>®</sup> is a registered trademark of Tridium, Inc.